



Primary Lithium Cylindrical Cells  
Lithium-Thionyl-Chloride

## Product Overview

Type Designation	Type No.	Voltage (V)	Capacity (mAh)	Diameter (mm)	Height (mm)	Weight (g)
Primary Lithium Cylindrical Cells - Series ER						
ER 1/2 AA	7126	3.6	1200	14.6	25.1	8.8
ER AA	7106	3.6	2400	14.6	50.5	16.0
ER C	7114	3.6	8500	25.9	50.0	51.0
ER D	7120	3.6	19000	33.8	59.7	100.0

## Quality


- High operation voltage
- Low self discharge (less than 1% per year at RT)
- Superior shelf life and operational life (up to 10 years and more)
- Wide temperature range (-55 to +85°C)

## Key Features – Benefits

- Safety: all cells are UL recognized
- Broad capacity range from 1200 - 19000 mAh
- Backup power supply for sophisticated safety applications

## Applications

- Metering
- Medical
- Home and office security systems
- Memory backup in elevated temperature environment
- Smoke detectors

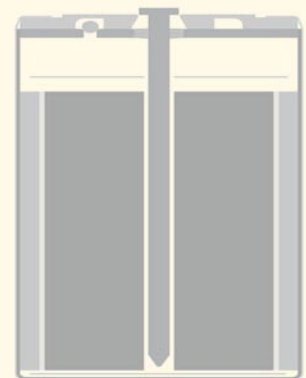

## Contact

### Headquarters Germany

VARTA Microbattery GmbH, Daimlerstraße 1, 73479 Ellwangen, Germany  
Tel +49 79 61 921 - 280 | Fax +49 79 61 921 - 553

### America

VARTA Microbattery, Inc., 1311 Mamaroneck Avenue, Suite 120  
White Plains, NY 10605, USA  
Tel +1 914 - 592 25 00 | Fax +1 914 - 345 04 88

### Asia Pacific

VARTA Microbattery Pte. Ltd., 300 Tampines Avenue 5, #05-01  
Tampines Junction, Singapore 529653  
Tel +65 6 260 58 01 | Fax +65 6 260 58 12

VARTA Microbattery is a Company of  
Montana Tech Components AG,  
Hauptstrasse 35, 5737 Menziken, Switzerland

**MONTANA**  
TECH COMPONENTS

